

SPECIFICATION

Part No. : **MA760.A.ABIC.003**

Product Name : Pantheon Antenna 4in1 MA760

Screw-Mount (Permanent Mount)

4G/3G/2G MIMO LTE, GPS/GLONASS/GALILEO, Wi-Fi

2.4/5GHz

Feature : 2 x Cellular (4G/3G/2G) MIMO Antennas

(698~960MHz, 1710~2170MHz, 2300~2700MHz,

2900-3500MHz)

1 x GPS/GLONASS/GALILEO 1575.42~1602MHz Active

Antenna

1 x Wi-Fi 2.4GHz / 5GHz Antennas

IP67 Waterproof

High Efficiency / Peak Gain Outdoor Antenna

RoHS Compliant





1. Introduction

The MA760 4in1 antenna is an omnidirectional heavy-duty, fully IP67 waterproof external M2M antenna for use in telematics, transportation and remote monitoring applications. It is the first antenna on the market to combine 4in1 that includes two LTE MIMO elements, one 2.4GHz/5GHz antenna and GPS/GLONASS/GALILEO in the highest efficiency and peak gain possible. This unique antenna delivers powerful MIMO antenna technology for LTE while also fully compatible with legacy 3G and 2G networks worldwide, plus GPS/GLONASS/GALILEO for next generation high bandwidth telematics systems.

New fleet management and mobile and fixed video technology allows for real-time video uplink and downlink. High efficiency, high gain MIMO antennas are necessary to achieve the high signal to noise ratio and throughput required to solve these challenges. The Pantheon MA760 consists of two Cellular 4G/3G/2G MIMO elements working at 698-960MHz, 1710-2170MHz, 2300~2700MHz, 2900-3500MHz which means it can work worldwide, one high gain GPS/GLONASS/GALILEO antenna at 1575.42 MHz and one dual-band Wi-Fi 2.4GHz/5GHz antenna.

The 4 high efficiency and gain antennas are mounted in an extremely robust IP67 direct mount antenna package with excellent isolation (20dB+). The antenna has its own ground-plane and can radiate on any mounting environment like metal or plastic without affecting performance.

The GPS/GLONASS/GALILEO antenna has a front end SAW filter configuration. The front-end SAW increases protection against out of band LNA burn out.

The Dual-band Wi-Fi antenna has stable efficiency and peak gain on both bands even at 3 meters cable length where other antennas would have marked reduced performance.

The connectors and cable lengths are customizable. The housing is also available in White. Recommended maximum cable length is 3 meters.



2. Specification Table

4G/3G/2G MIMO ANTENNA					
Frequency (Mhz)	698~960	1710~2170	2300~2700	2900-3500	
VSWR	3 Max				
Polarization	Vertical				
Impedance	50 Ω				

2.4GHz / 5GHz ANTENNA					
Frequency (GHz)	2.4 ~ 2.5	4.7 ~ 5.0	5.0 ~ 5.4	5.4 ~ 5.9	
Peak Gain (dBi)	2.1	2.9	3.8	2.8	
Average Gain (dBi)	-2.3	-3.6	-3.3	-3.8	
Efficiency	60%	44%	46%	42%	
VSWR	<=1.7:1				
Impedance	50Ω				
Polarization	Linear				
Radiation Pattern	Omnidirectional				

GPS-GLONASS-GALILEO						
Centre Frequency	1575.42MHz / 1602MHz					
Bandwidth		10MHz				
Radiation Efficiency	50(without cable)					
Passive Gain @ Zenith	4.0 typ(with ψ=140mm ground)					
VSWR		2				
Impedance	50Ω					
DC Power Input Range	3 ~ 5V					
DC input	3.3V		4.0V		5.5V	
MHz	1575.4	1602	1575.4	1602	1575.4	1602
VSWR	2	2	2	2	2	2
LNA Gain	29.2	29	31	31	32.3	32
Noise Figure	3.1	3.1	3.2	3.2	3.4	3.4
Power Consumption	7.5	7.5	9.4	9.4	15	15
Band Attenuation	1520MHz: -20dB 1520MHz: -20dB			1520MHz: -20dB		
	1642MHz: -20dB 1642MHz: -20dB 1642MHz: -20dB					
Cable	3m RG-174 standard, fully customizable					
Connector	SMA(M) standard, fully customizable					



MECHANICAL					
Antenna Dimensions	H: 85.7mm, D: 145.6mm				
Casing	Wonderloy PC-540 PC/ABS Alloy				
Waterproof	IP67				
4G/3G/2G MIMO 1	3M Low Loss CFD-200 SMA(M)				
4G/3G/2G MIMO 2	3M Low Loss CFD-200 SMA(M)				
2.4/5GHz MIMO 1	3M Low Loss CFD-200 RP-SMA(M)				
GPS/GLONASS/GALILEO	3M RG-174 SMA(M)				
ENVIRONMENTAL					
Operation Temperature	-40°C to 85°C				
Storage Temperature	-40°C to 90°C				
Humidity	Non-condensing 65°C 95% RH				

^{*} all measurements were conducted with 3 meters low loss CFD200 cable



LTE BANDS					
Band Number	LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA				
	Uplink	Downlink	MIMO 1	MIMO 2	
1	UL: 1920 to 1980	DL: 2110 to 2170	✓	✓	
2	UL: 1850 to 1910	DL: 1930 to 1990	✓	✓	
3	UL: 1710 to 1785	DL: 1805 to 1880	✓	✓	
4	UL: 1710 to 1755	DL: 2110 to 2155	✓	✓	
5	UL: 824 to 849	DL: 869 to 894	✓	×	
7	UL: 2500 to 2570	DL:2620 to 2690	✓	✓	
8	UL: 880 to 915	DL: 925 to 960	✓	×	
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓	✓	
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	×	×	
12	UL: 699 to 716	DL: 729 to 746	✓	✓	
13	UL: 777 to 787	DL: 746 to 756	✓	✓	
14	UL: 788 to 798	DL: 758 to 768	✓	✓	
17	UL: 704 to 716	DL: 734 to 746 (LTE only)	✓	✓	
18	UL: 815 to 830	DL: 860 to 875 (LET only)	✓	×	
19	UL: 830 to 845	DL: 875 to 890	✓	×	
20	UL: 832 to 862	DL: 791 to 821	✓	×	
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	×	×	
22	UL: 3410 to 3490	DL: 3510 to 3590	✓	×	
23	UL:2000 to 2020	DL: 2180 to 2200 (LTE only)	✓	✓	
24	UL:1625.5 to 1660.5	DL: 1525 to 1559 (LTE only)	✓	✓	
25	UL: 1850 to 1915	DL: 1930 to 1995	✓	✓	
26	UL: 814 to 849	DL: 859 to 894	✓	×	
27	UL: 807 to 824	DL: 852 to 869 (LTE only)	✓	×	
28	UL: 703 to 748	DL: 758 to 803 (LTE only)	✓	×	
29	UL: -	DL: 717 to 728 (LTE only)	✓	✓	
30	UL: 2305 to 2315	DL: 2350 to 2360 (LTE only)	✓	✓	
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5 (LTE only)	×	×	
32	UL: -	DL: 1452 - 1496	×	×	
35	1850 to 1910		✓	✓	
38	2570 to 2620		✓	✓	
39	1880 to 1920		✓	✓	
40	2300 to 2400		✓	✓	
41	2496 to 2690		✓	✓	
42	3400 t	o 3600	✓	×	
43	3600 to 3800		×	×	


^{*}Covered bands represent an efficiency greater than 20%



3. LTE MIMO

3.1. LTE MIMO 1 and LTE MIMO 2 Specification

3.1.1. Return Loss

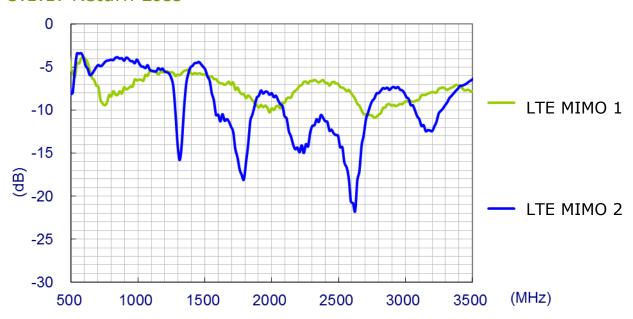


3.1.2. Maximum Gain






3.1.3. Average Gain

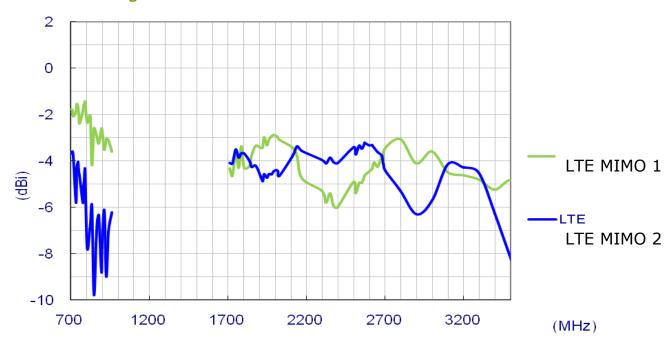

3.1.4. Efficiency

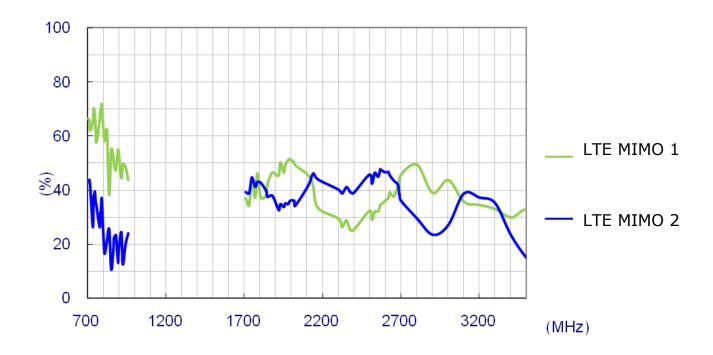




3.2. Radiation Patterns






3.2.1. LTE MIMO 1 Radiation Pattern


XY Plane

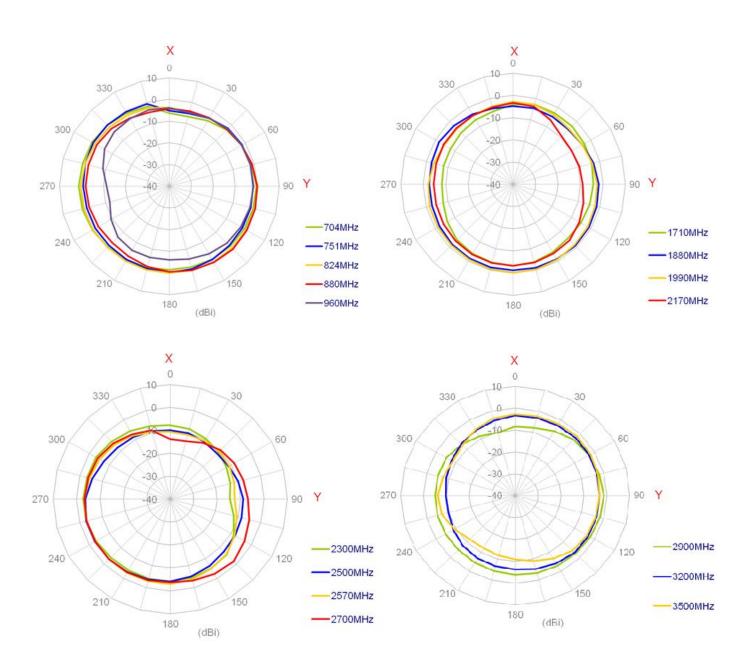



XZ Plane

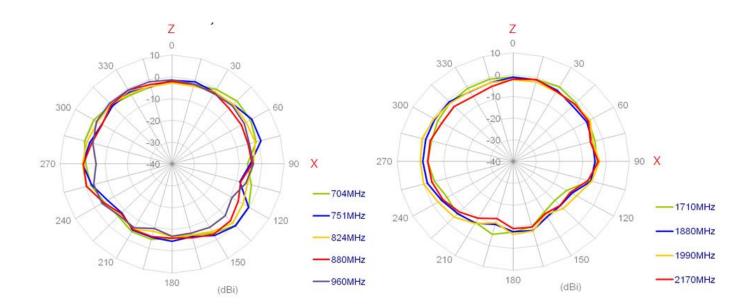


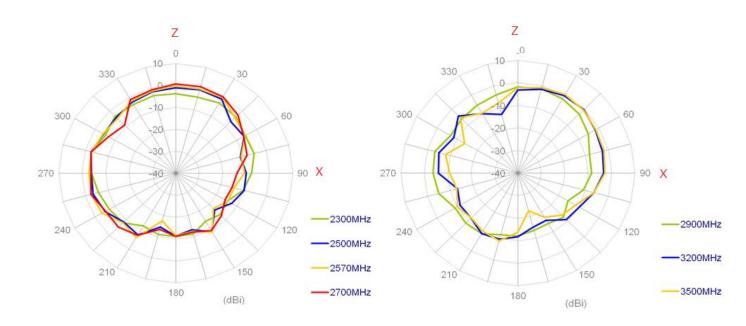




3.2.2. LTE MIMO 2 Radiation Pattern


XY Plane

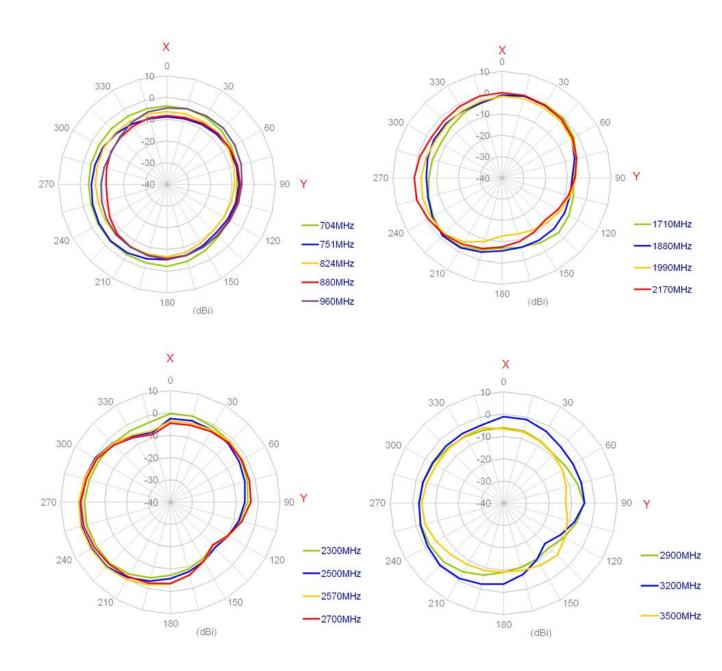





XZ Plane

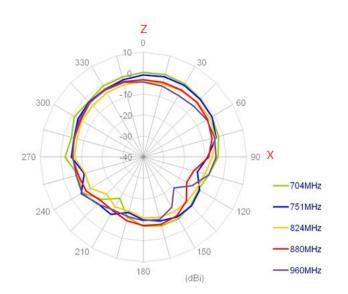

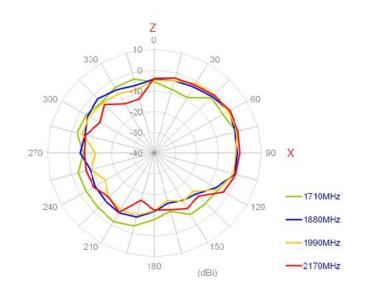

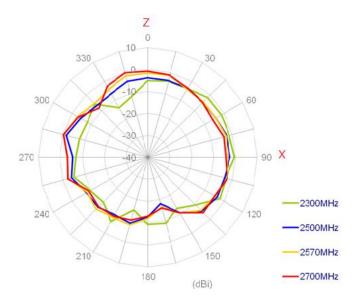


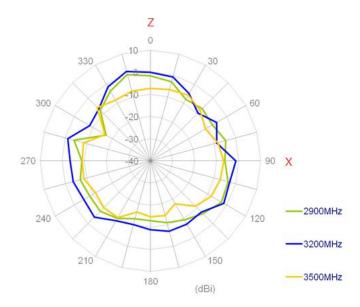




4. Wi-Fi 2.4/ 5GHz

4.1. Return Loss

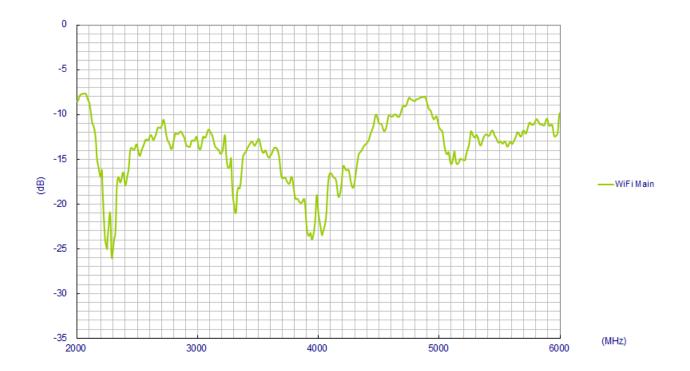




4.2. Maximum Gain

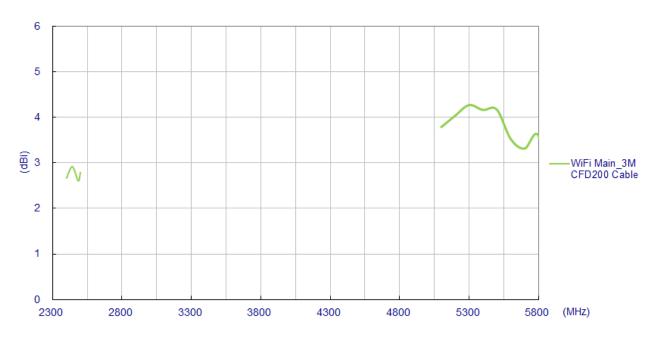


4.3. Average Gain

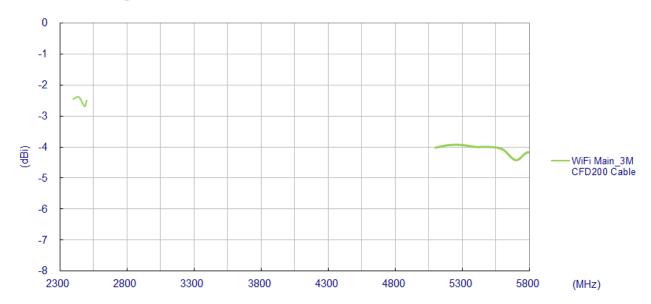



4.4. Efficiency

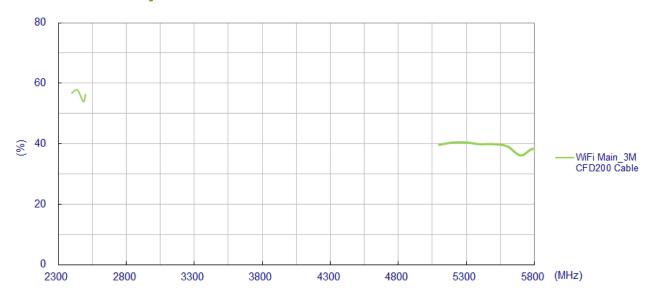




4.5. Radiation Patterns






XY plane

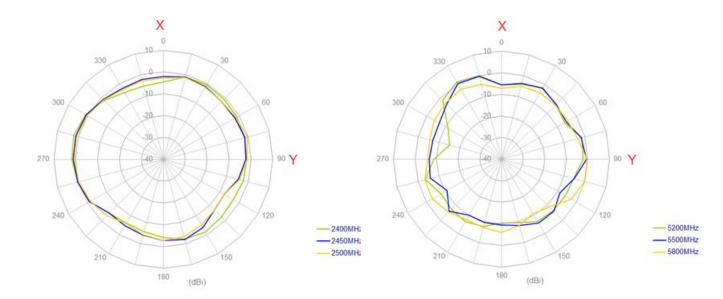

XZ plane

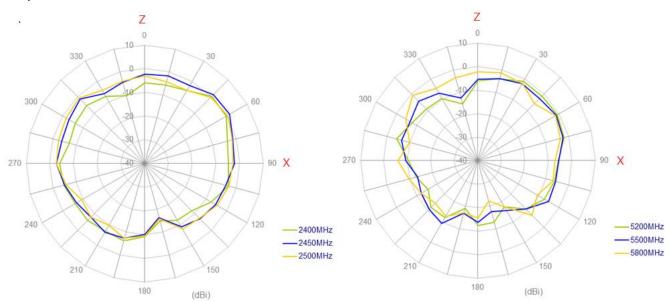


SPE-13-8-001/G/PK

Page 17 of 26




5. GPS/GLONASS/GALILEO

5.1. Block diagram

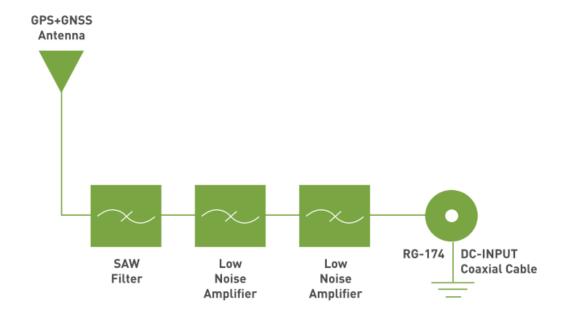


5.2. Return Loss



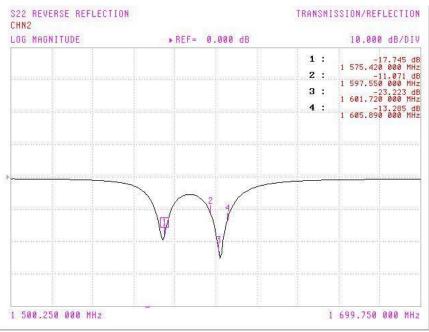


5.3. Radiation pattern



XYZ co-ordinate for reference.


5.3.1. XZ Plane Free space @1575.42MHz



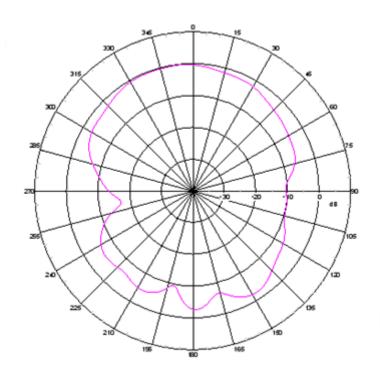




5.3.2. YZ Plane Free Space @1575.42MHz

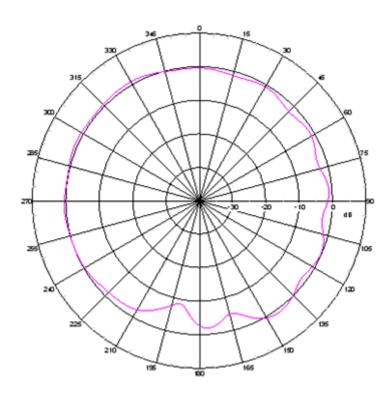




5.3.3. XZ Plane Free space @1602MHz

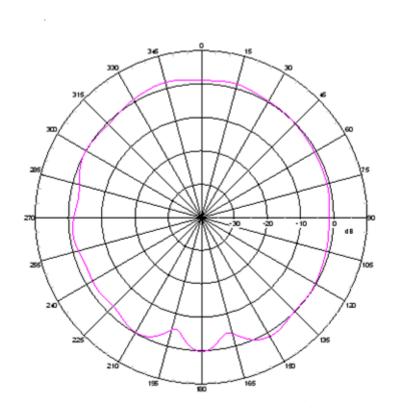




5.3.4. YZ Plane free space @1602MHz

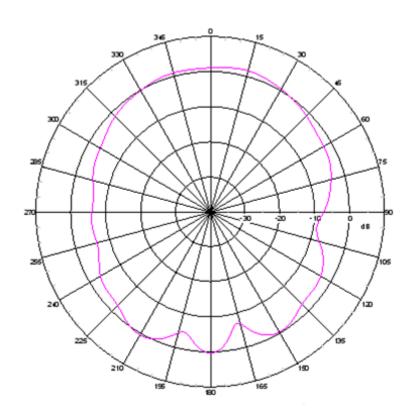




5.4. GPS/GLONASS/GALILEO LNA

S21 Forward Transmission

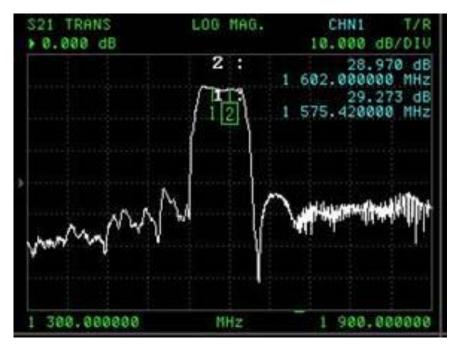


S22 Reverse Reflection

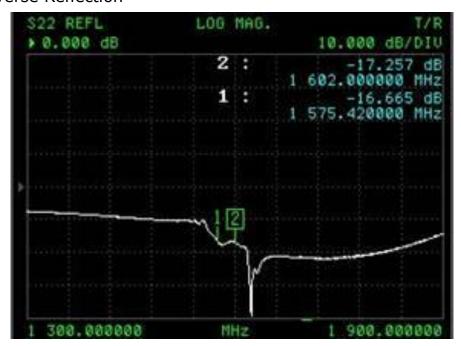



6. Drawing (Unit: mm)

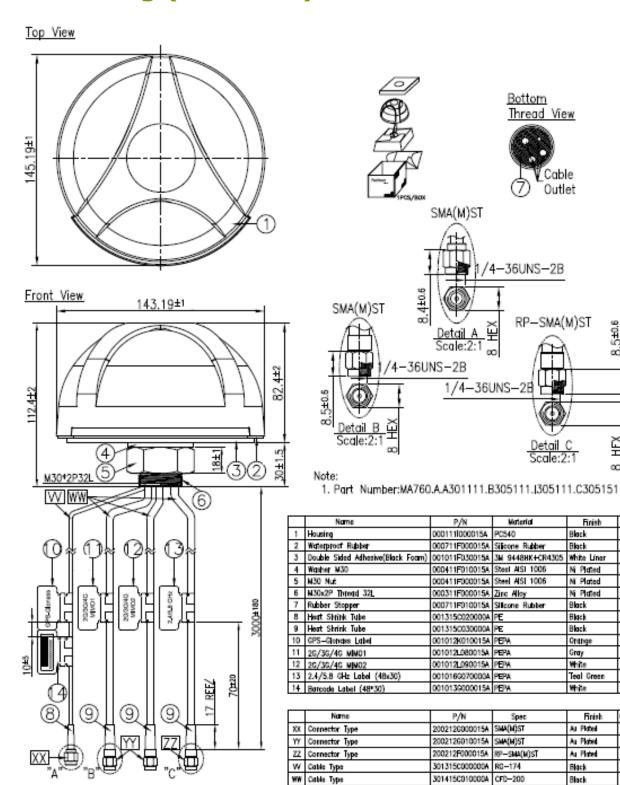

5±0.6

∞

Ř

QTY

QTY

Finish



7. Packaging

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice.

Taoglas reserves the rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.